

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2004 (06.05.2004)


PCT

(10) International Publication Number
WO 2004/038108 A1

- (51) International Patent Classification⁷: **E02D 27/42**, 27/52, E04H 12/22, F03D 1/00
- (21) International Application Number: PCT/GB2003/004529
- (22) International Filing Date: 20 October 2003 (20.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0224656.9 23 October 2002 (23.10.2002) GB
- (71) Applicant (for all designated States except US): **THE ENGINEERING BUSINESS LIMITED** [GB/GB]; Broomhaugh House, Riding Mill, Northumberland NE44 6EG (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WATCHORN, Michael, John** [GB/GB]; The Old Coach House, High Mickley, Nr Stocksfield, Northumberland NE43 7LU (GB).
- (74) Agent: **HARRISON GODDARD FOOTE**; Belgrave Hall, Belgrave Street, Leeds LS2 8DD (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MOUNTING OF OFFSHORE STRUCTURES

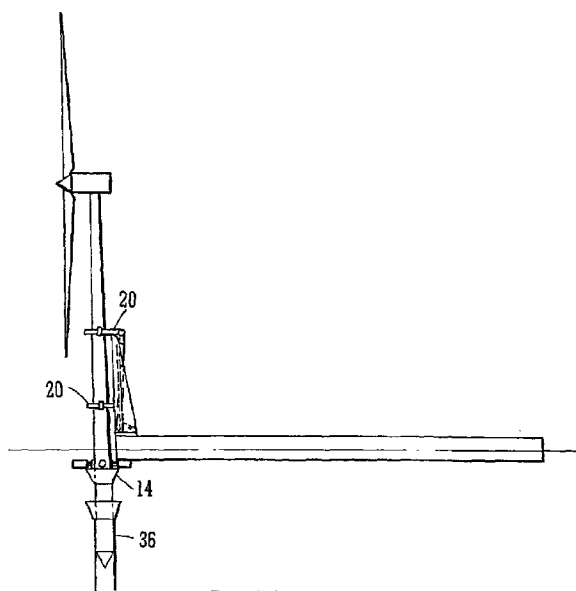

(57) Abstract: Offshore structures such as wind turbines, wave machines and tidal stream turbines are mounted in a previously located foundation including a socket. The foundation includes an upper body with a conical inner surface which acts as a guide for inserting a leading end of the structure into the socket. The conical surface also provides a reaction surface for alignment means for setting the vertical alignment of the structure when inserted in the socket. Clamp means are provided supported by an A frame for controlled lowering of the structure into the socket.

WO 2004/038108 A1

Mounting of Offshore Structures

The present invention relates to the mounting of structures offshore and more
5 especially to the mounting of structures such as wind turbines, wave machines and
tidal stream turbines.

Conventionally, wind turbines or the like are mounted offshore in a suitable
foundation. The wind turbines are transported to the installation site, either in a
10 complete state or for assembly on site, by means of a jack up barge. However, jack
up barges are expensive and can be difficult to use in certain locations where difficult
seabed conditions or strong currents occur.

The present invention therefore seeks to provide method and apparatus for
15 installation and alignment of offshore structures such as wind turbines which permits
the use of towed or self-propelled barges or other suitable vessels to support the
structure and further enables alignment of the structure at a desired angle (normally
vertical) even where the foundation is installed at an angle.

20 According to a first aspect of the present invention there is provided a foundation for
mounting an offshore structure, the foundation comprising a socket for receiving and
retaining an end part of the structure, the socket having a base surface preferably of
conical shape, an intermediate supporting part and an upper body having an internal
guiding surface for guiding said end part into the intermediate supporting part, said
25 guiding surface also forming a reaction surface operatively co-operating with
alignment means of the structure for alignment of the structure when inserted in the
foundation.

Preferably said guiding surface is frusto-conical.
30

Further preferably said intermediate supporting part has a substantially cylindrical inner surface sized to conform with a corresponding outer surface of said end part.

According to a second aspect of the invention there is provided a structure for
5 mounting in the foundation of the first aspect of the invention, said structure comprising an end part for insertion into the socket of the foundation, said end part preferably having a leading end portion preferably of substantially conical shape corresponding to said conical base surface, and alignment means mounted on said
10 end part operative to co-operate with said guiding surface when said end part is in the socket to align the structure into a desired alignment.

In a preferred embodiment of this aspect the invention, the alignment means are removable.

15 Preferably, the outer surface of the end part is substantially cylindrical.

Preferably also, the a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the (preferably) conical leading end portion is prevented from fully abutting the conical base surface of the
20 socket.

According to a third aspect of the invention there is provided the combination of a foundation for mounting an offshore structure and a structure mountable in the foundation, wherein the structure comprises an end part preferably having a leading
25 end portion preferably of substantially conical shape and alignment means located on the leading end part, the foundation comprising a socket comprising a base surface preferably of substantially conical shape sized substantially to conform with the substantially conical end portion, an intermediate supporting part and an upper body having an internal guiding surface wherein the socket operatively receives the leading
30 end part such that the base surface and the end portion are in juxtaposition and the internal guiding surface operatively provides a reaction surface against which the

alignment means operatively act for adjustment of the structure into a desired alignment.

Preferably in this third aspect of the invention the alignment means are removeable.

5

Preferably also the internal guiding surface is frusto-conical.

In a much preferred embodiment, the inner surface of the intermediate supporting part and the outer surface of the end part of the structure are cylindrical.

10

In another preferred embodiment of this aspect of the invention said inner and outer surfaces are spaced apart in use. This allows the joint between the structure and the socket to be filled with grout to secure the structure in the socket in the desired alignment.

15

In another preferred embodiment a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the (conical) leading end portion is prevented from fully abutting the (conical) base surface of the socket. This feature assists in ensuring that a space between the structure and the socket is provided (for the insertion of grout) and also allows the structure to be aligned (with respect to the vertical) and also rotated as necessary before it is fixed in position.

20

A fourth aspect of the invention provides apparatus for mounting a structure as according to the second aspect of the invention in a foundation according to the first aspect of the invention, the apparatus comprising a transporting barge, means for retaining the structure on the barge during transportation in a reclined position, means for moving the structure from the reclined position to an upright position and for lowering the structure in said upright position over the side of the barge, and a guide wire attachable to the end of the structure for guiding the leading end of the structure into the socket.

30

Preferably the means for moving the structure from the reclined position to an upright position comprises a winched cable-stayed "A" frame.

5 Preferably the structure is retained while in its upright position, and lowered, by means of one or more clamps engaging the structure, the clamping arrangement allowing controlled axial movement of the structure relative to the means for supporting the structure.

10 Preferably the apparatus further comprises means for supplying grout to the joint between the end part of the structure and the socket.

Preferably also the means comprise supply hoses which are operatively disconnectable from the supply of grout and are sealable, and the apparatus further
15 comprises a buoy to which the supply hoses may be attached after disconnection from the supply of grout.

Preferably the apparatus further comprises means for recovering the alignment means after the structure has been mounted in the foundation.

20

According to a fifth aspect of the invention there is provided method of mounting an offshore structure in a sub-surface foundation, the method comprising:

- i) providing a sub-surface foundation according to the first aspect of the invention;
- 25 ii) providing a structure according to the second aspect of the invention and supporting the structure in a reclined position on a barge;
- iii) providing a winched cable stayed A frame on the barge and moving the structure from the reclined position to an upright position by means of the A frame;
- 30 iv) supporting the structure in its upright position by means of clamps attached to the A frame;

- v) attaching a guide wire to a end part of the structure and guiding the end part of the structure into the socket of the foundation by means of the guide wire;
 - vi) lowering the alignment means down the end part of the structure until the alignment means engage the internal guiding surface of the upper body of the socket and adjusting the alignment of the structure by means of the alignment means acting on the internal guiding surface until a desired alignment is achieved; and
 - vii) releasing the clamps supporting the structure.
- 10 A preferred embodiment of this aspect of the invention further comprises the steps of:
- viii) providing grout injection hoses and injecting grout into the joint between the structure and the socket;
 - ix) sealing the grout injection hoses; and
 - 15 x) attaching the sealed clamp hoses to a surface buoy.

Preferably the method of this embodiment comprises the further step of recovering the grout injection hoses and/or the alignment means when the grout in the joint has set.

20

For a better understanding of the invention and to show how the same may be carried into effect, reference will be made to the following drawings in which:

Figure 1 shows a schematic plan view of a structure according to the invention carried in a reclined position in a transporting barge;

25

Figure 2 is a schematic side view of the structure and barge of Figure 1;

Figure 3 is a schematic side view of the barge and structure with the structure in its upright position;

30

Figure 4 is a view similar to Figure 3 showing the structure lowered into the foundation;

Figures 5 and 6 are schematic side views illustrating the disconnection and removal
5 of the barge from the structure;

Figure 7 is a schematic side view illustrating the removal of the alignment means;

Figure 8 is a schematic side view similar to Figure 3 showing alternative clamps for
10 supporting the structure;

Figure 9 illustrates schematically on a larger scale the mounting of the structure in its foundation; and

15 Figure 10 illustrates schematically an alternative construction of the invention.

Referring now to the drawings, Figures 1 and 2 show a barge or other suitable vessel
2 carrying a structure in the form of a wind turbine 4 in a reclined position so that the nacelle 6 and rotor 8 are supported (the particular support means are not shown).

20 Typically the nacelle and rotor will have a weight of around 100tonnes. The structure 4 has an end part 10 having a conical leading end portion 12. Alignment means 14 are disposed on the end part 10. The structure 4 is attached to an A frame 16 operated with winches 18. The winches may typically be 50 tonne winches. A typical winch system for the "A" frame includes twelve fall lifting on each side with
25 the winches working at, say, 30m per minute line speed. In this arrangement, erection of the structure 4 to the upright position shown in Figure 3 takes about 10 minutes. The above mentioned parameters are exemplary only and the person skilled in the art will select suitable parameters according to the particular task in hand, such as the size, weight and location of the structure..

30

In the upright position, the structure 4 is supported by a number of clamps 20. In the clamping arrangement illustrated in Figures 3 and 4, the clamps 20 comprise two (or more) separate radial clamps, spaced axially along the structure. The structure is lowered from the barge 2 into the foundation 30 in a controlled manner by, for
5 example, opening a lower one of the clamps and causing the upper one of the clamps to move downwardly, so taking the structure 4 downwardly towards the foundation 30. At the limit of movement of the upper clamp (or at a desired point before that), the lower clamp is engaged, and the upper clamp is released and returned to its initial position. The sequence is then repeated until the structure 4 is lowered into the
10 foundation. The sequence may be applied in reverse for removal of the structure 4 from the foundation 30.

In a less preferred variation, separate means such as a crane are provided to support the weight of the structure and the clamps are used only for alignment of the structure
15 4.

In the clamping arrangement shown in Figure 8, clamps in the form of track type tensioners are used to support the structure 4. These track type tensioners take the form of a plurality of continuous articulated tracks arranged radially around the
20 structure. Each track comprises a plurality of track links each articulated to a neighbouring track link to form a continuous loop. Each track link is provided with a gripping surface for gripping the structure 4. The tracks are arranged to lie axially with respect to the structure 4 so that by driving the tracks in a forward or reverse direction, the structure 4 may be moved up or down. An advantage of track type
25 tensioners is that they can accommodate structure of shapes other than plain cylindrical, such as tapering shapes which is more difficult to achieve with the annular clamps of Figure 3 and 4. For this purpose, the track type tensioners can be mounted on a bogie arrangement which ensures that the tracks make contact with the structure along their entire working length rather than at a single point.

30

In erecting the structure 4, a combination of hydraulic cylinders and/or cables can be used to ensure that as the weight of the structure 4 passes overcentre the motion of the A frame is controlled. Alternatively, the pivots on which the A frame is mounted can be located to ensure that the weight always remains on the barge side of the
5 pivot, so that the need to overcentre is avoided.

When the structure 4 is in its upright position a guide or pull wire is attached to the end part 10 of the structure 4. The guide wire is used to guide the end part 10 of the structure into a pre-positioned foundation 30. The foundation 30 includes a socket
10 32 having a base surface 34 having an internally conical shape and a generally cylindrical intermediate part 36. Mounted at an upper part of the intermediate part 36 is an upper body 38. The upper body 38 includes an internal surface 40 which is frusto-conical. As the structure 4 is lowered from the barge by use of the clamps 20 the inner surface 40 assists in guiding the end part 10 of the structure 4 into the
15 socket 32, in combination with the conical leading end portion 12 and the guide wire. Once the structure 4 is accommodated in the socket 32, the structure provides a temporary means of locating the barge which permits movement of the barge in the swell of the water and rotationally around the structure 4 but prevents translational movement of the barge away from the structure.

20 An "interface ball" 13 in the form of a curved, spherical or part spherical element is disposed on the apex of leading end portion 12 (Figure 9). This interface ball has a number of functions. In particular, the interface ball ensures that the walls of the socket and of the end part 10 of the structure are maintained in slightly spaced apart
25 relation. This allows rotation of the structure 4 with respect to the socket during installation and also allows some movement of the structure relative to the socket during installation so that a desired alignment of the structure 4 with respect to the vertical can be achieved, even where the foundation is not absolutely correctly aligned. Normally, the desired alignment is vertical. The spacing apart of the walls
30 of the structure and socket also provides a void which can be filled with grout to set the structure in its desired alignment. During the alignment of the structure, the

clamps 20 are placed in a constant low tension to accommodate heaving up and down of the barge 2 in any swell.

When the structure 4 has been located in the socket 32, alignment of the structure 4 is undertaken. For this purpose, alignment means 14 are lowered down the end part 10 until they contact the inner surface 40. The alignment means preferably comprise a plurality of hydraulic cylinders and typically four such cylinders are provided. One the alignment means are in place, the clamps 20 can be released. The alignment means 14 are then used to set the structure 4 in its desired alignment. The inner surface 40 acts at this stage as a reaction surface against which the alignment means 14 (hydraulic cylinders) act to provide the required movement of the structure to adjust its position and, when that position is achieved, to retain the structure in that position. Once the desired alignment is achieved, the alignment means can be locked in position.

15

In one preferred arrangement of the invention where the installation of the structure is essentially permanent, grout is injected into the void between the walls of the socket 32 and the end part 10 of the structure through suitable hoses. When the joint is full of grout, the hoses can be sealed off and attached to a buoy. The barge 2 can then move away and be engaged in other work. When the grout is fully set a barge 2 may return to retrieve the alignment means 14.

20

In an alternative arrangement, the alignment means 14 may be left in place when locked in position and no grout is then required. This facilitates later removal of the structure 4, for example for maintenance on land. In this case, the alignment means 14 which may be shove cylinders, screw jacks or the like can be built as a fixed part of the structure 4 so that for removal of the structure 4 it is not necessary to pick up cables, hoses and the like to initiate release of the alignment means 14, these being provided integrally with the structure.

25

30

In a variation of the invention illustrated in Figure 10 and interface piece 50 is provided at the top of the foundation 30'. The interface piece 50 is set in a desired alignment during installation in the foundation 30', such as by grouting (54) to the foundation 30'. The interface piece 50 includes an inner surface 540 analogous to
5 inner surface 40. Thus the structure 4 can be lowered into a socket 32' of the interface piece 50 in the same manner as described above in relation to foundation 30, but because the interface 50 determines the correct alignment, separate alignment means are not needed. A number of tapered clamps 52 are desirably provided to grip the structure and retain it in its desired position. In this construction, the weight of
10 the structure 4 essentially holds the structure in place in the foundation. For removal of the structure 4 the tapered clamps may be removed by a tool frame which releases the structure and allows it to be removed from the foundation.

Claims:

1. A foundation for mounting an offshore structure, the foundation comprising a socket for receiving and retaining an end part of the structure, the socket having a base surface, an intermediate supporting part and an upper body having an internal guiding surface for guiding said end part into the intermediate supporting part, said guiding surface also forming a reaction surface operatively co-operating with alignment means of the structure for alignment of the structure when inserted in the foundation.
2. A foundation as claimed in claim 1 wherein said guiding surface is frusto-conical.
3. A foundation as claimed in claim 1 or 2 wherein said intermediate supporting part has a substantially cylindrical inner surface sized to conform with a corresponding outer surface of said end part.
4. A structure for mounting in the foundation of any of claims 1 to 3, said structure comprising an end part for insertion into the socket of the foundation, said end part having alignment means mounted on said end part operative to co-operate with said guiding surface when said end part is in the socket to align the structure into a desired alignment.
5. A structure as claimed in claim 4 wherein the alignment means are removable.
6. A structure as claimed in claim 4 or 5 wherein the outer surface of the end part is substantially cylindrical.
7. A structure as claimed in claim 4, 5 or 6 wherein the end part further includes a leading end portion of substantially conical shape.

8. A structure as claimed in claim 7 wherein a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the conical leading end portion is prevented from fully abutting the base surface of the socket.
- 5
9. A foundation as claimed in any of claims 1 to 3 for co-operation with a structure as claimed in claim 7 or 8 wherein the base surface of the socket is of substantially conical shape to generally conform with the conical leading end portion of the structure.
- 10
10. The combination of a foundation for mounting an offshore structure and a structure mountable in the foundation, wherein the structure comprises an end part having a leading end portion of substantially conical shape and alignment means located on the leading end part, the foundation comprising a socket
- 15
- comprising a base surface of substantially conical shape sized substantially to conform with the substantially conical end portion, an intermediate supporting part and an upper body having an internal guiding surface wherein the socket operatively receives the leading end part such that the conical base surface and the conical end portion are in juxtaposition and the internal guiding surface
- 20
- operatively provides a reaction surface against which the alignment means operatively act for adjustment of the structure into a desired alignment.
11. A combination as claimed in claim 10 wherein the alignment means are removeable.
- 25
12. A combination as claimed in claim 10 or 11 wherein the internal guiding surface is frusto-conical.
13. A combination as claimed in claim 10, 11 or 12 wherein the inner surface of the
- 30
- intermediate supporting part and the outer surface of the end part of the structure are cylindrical.

14. A combination as claimed in claim 13 wherein said inner and outer surfaces are spaced apart in use.
- 5 15. A combination as claimed in any of claims 10 to 14 wherein a curved, substantially spherical or part spherical element is disposed on the tip of the leading end portion whereby the conical leading end portion is prevented from fully abutting the conical base surface of the socket.
- 10 16. Apparatus for mounting a structure as claimed in any of claims 4 to 8 in a foundation as claimed in any of claims 1 to 3 or 9, the apparatus comprising a transporting barge, means for retaining the structure on the barge during transportation in a reclined position, means for moving the structure from the reclined position to an upright position and for lowering the structure in said
15 upright position over the side of the barge, and a guide wire attachable to the end of the structure for guiding the leading end of the structure into the socket.
17. An apparatus as claimed in claim 16 wherein the means for moving the structure from the reclined position to an upright position comprises a cable-stayed "A"
20 frame.
18. An apparatus as claimed in claim 16 or 17 wherein the structure is retained while in its upright position, and lowered, by means of one or more clamps engaging the structure.
25
19. An apparatus as claimed in any of claims 16 to 18 further comprising means for supplying grout to the joint between the end part of the structure and the socket.
20. An apparatus as claimed in claim 19 wherein the means comprise supply hoses
30 which are operatively disconnectable from the a supply of grout and are sealable,

the apparatus further comprises a buoy to which the supply hoses may be attached after disconnection from the supply of grout.

21. An apparatus as claimed in any of claims 16 to 20 further comprising means for
5 recovering the alignment means after the structure has been mounted in the foundation.



22. A method of mounting an offshore structure in a sub-surface foundation, the method comprising:

- 10 i) providing a sub-surface foundation as claimed in any of claims 1 to 3 or 9;
- ii) providing a structure as claimed in any of claims 4 to 8 and supporting the structure in a reclined position on a barge;
- iii) providing a winched cable stayed A frame on the barge and moving the structure from the reclined position to an upright position by means of the A
15 frame;
- iv) supporting the structure in its upright position by means of clamps attached to the A frame;
- v) attaching a guide wire to a end part of the structure and guiding the end part of the structure into the socket of the foundation by means of the guide wire;
- 20 vi) lowering the alignment means down the end part of the structure until the alignment means engage the internal guiding surface of the upper body of the socket and adjusting the alignment of the structure by means of the alignment means acting on the internal guiding surface until a desired alignment is achieved; and
- 25 vii) releasing the clamps supporting the structure.

23. A method as claimed in claim 22 further comprising the steps of:

- viii) providing grout injection hoses and injecting grout into the joint between the structure and the socket;
- 30 ix) sealing the grout injection hoses; and
- x) attaching the sealed clamp hoses to a surface buoy.

24. A method as claimed in claim 23 including the further step of
- xi) recovering the grout injection hoses and/or the alignment means when the grout in the joint has set.
- 5
25. A method substantially as hereinbefore described with reference to any of Figures 1 to 10.
26. A combination substantially as hereinbefore described with reference to any of
- 10 Figures 3 to 10.
27. A structure substantially as hereinbefore described with reference to any of figures 1 to 10.
- 15 28. An apparatus substantially as hereinbefore described with reference to any of figures 1 to 5, 7 or 8.

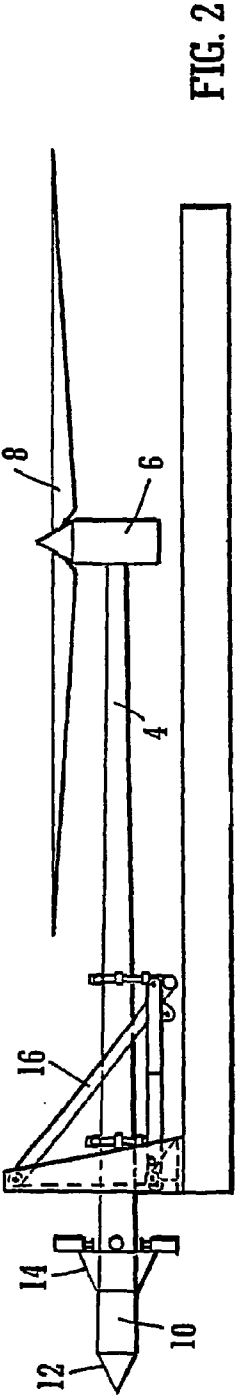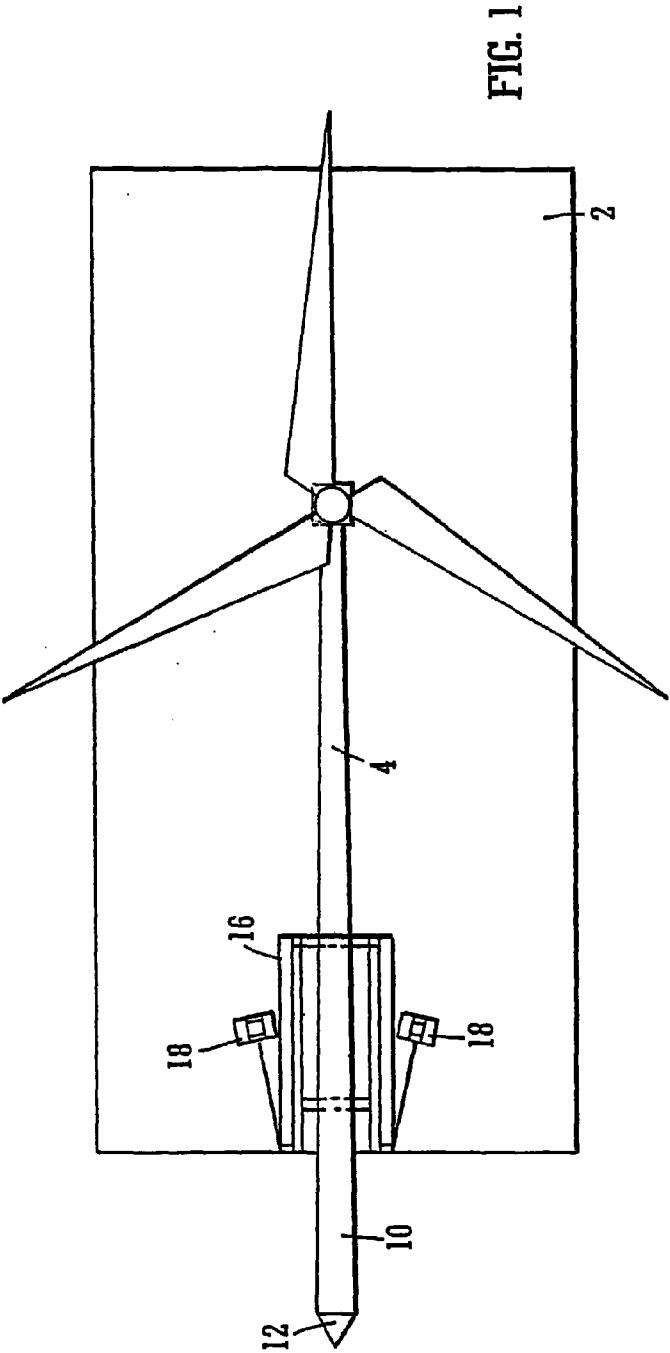

2/9

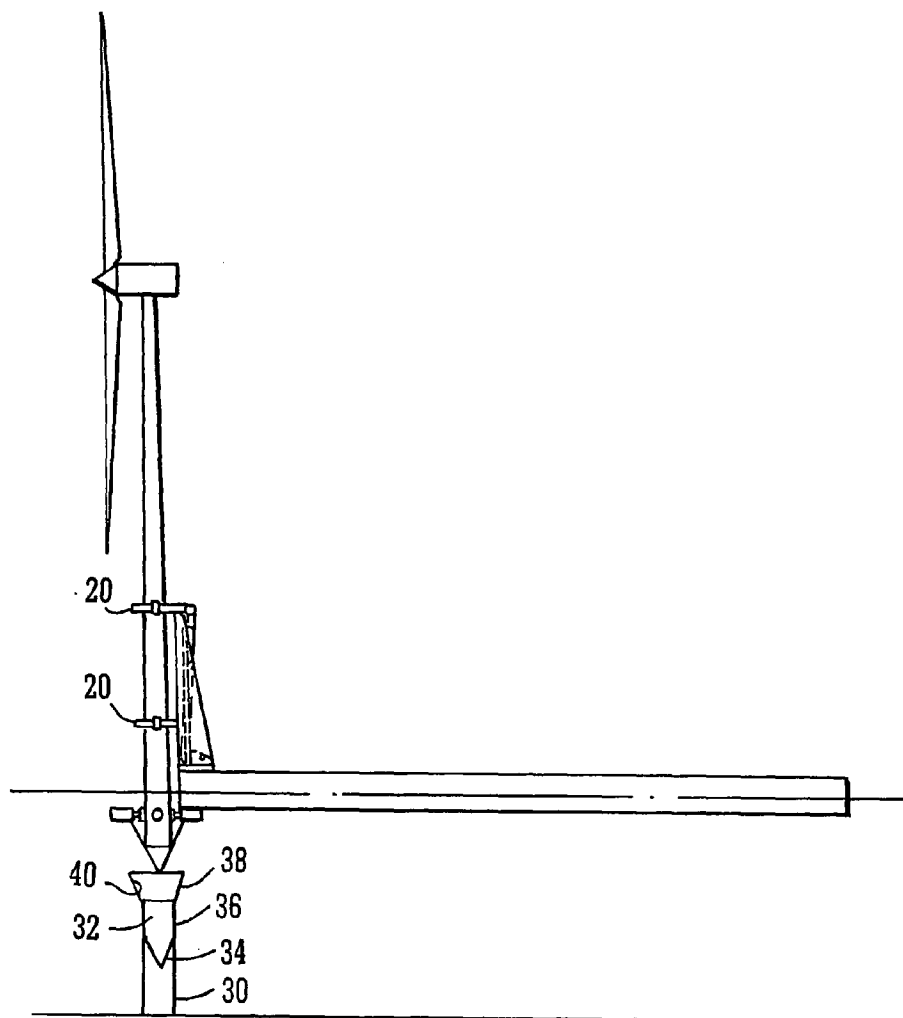


FIG. 3

3/9

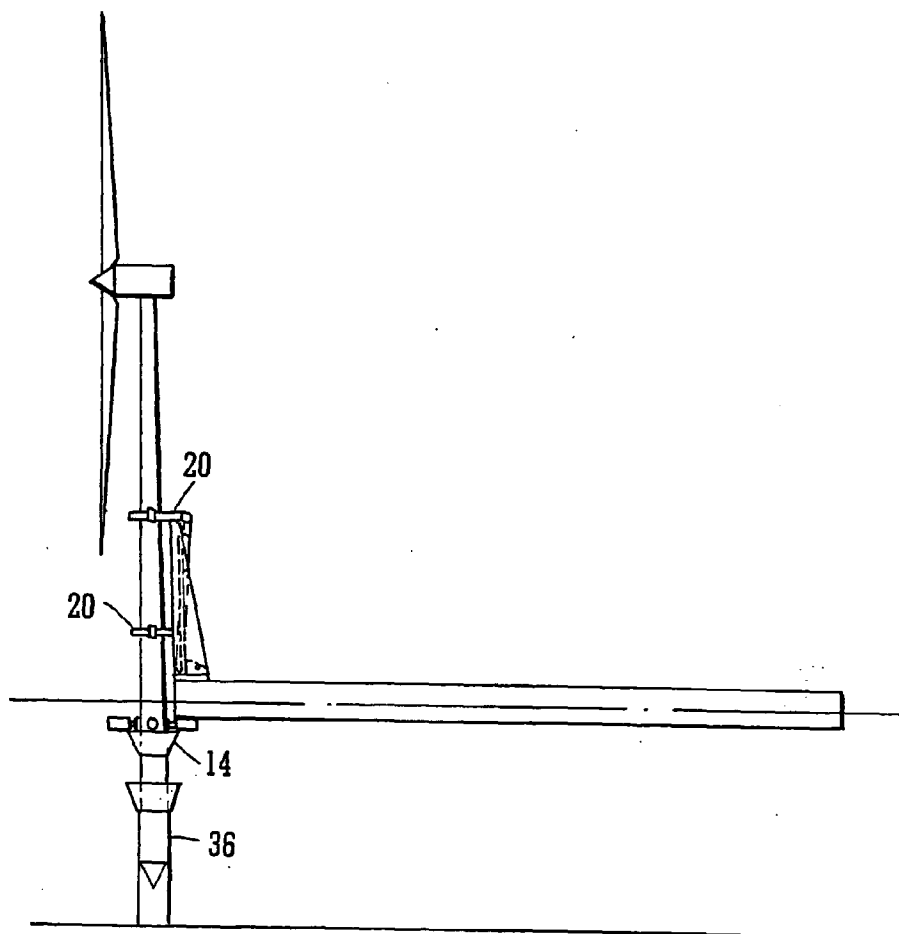


FIG. 4

4/9

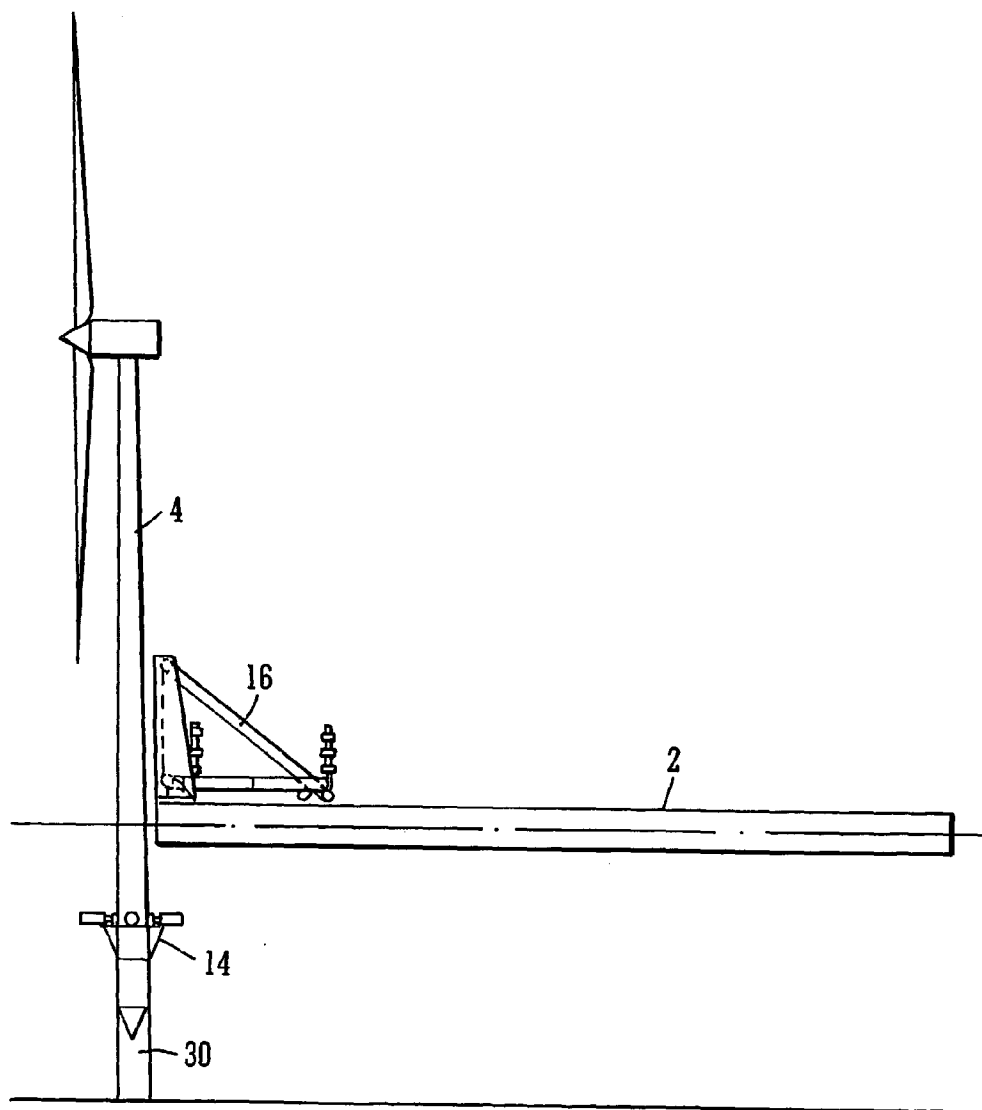


FIG. 5

5/9

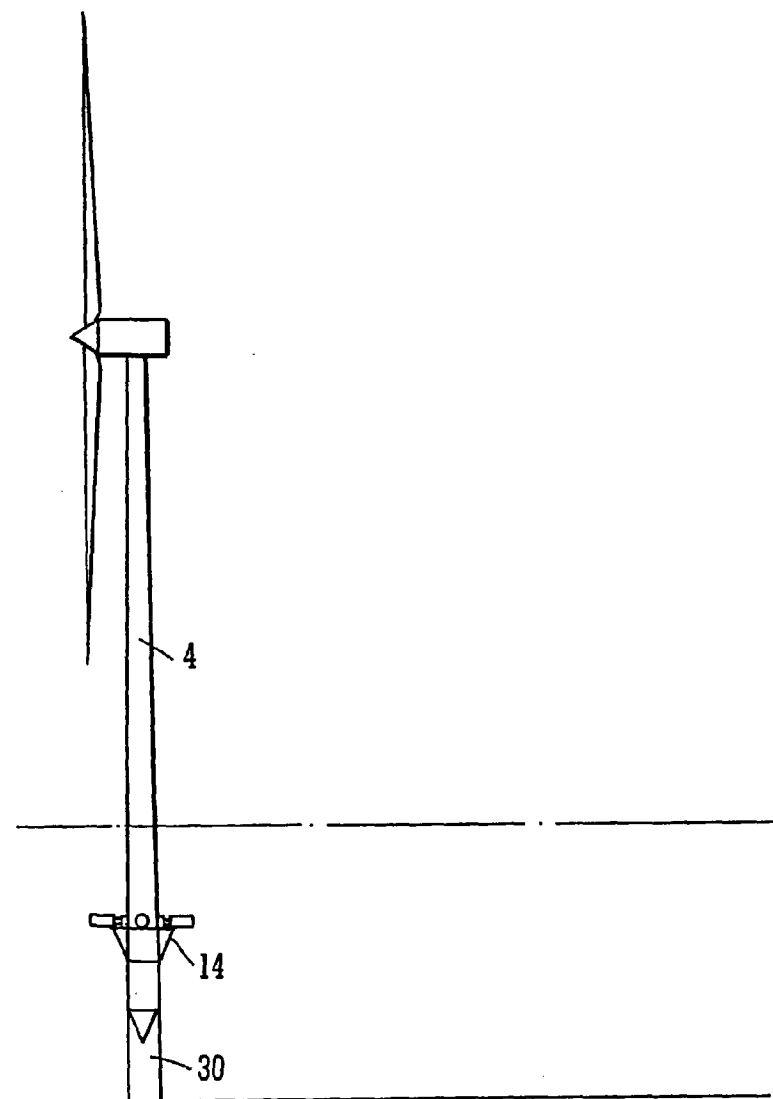


FIG. 6

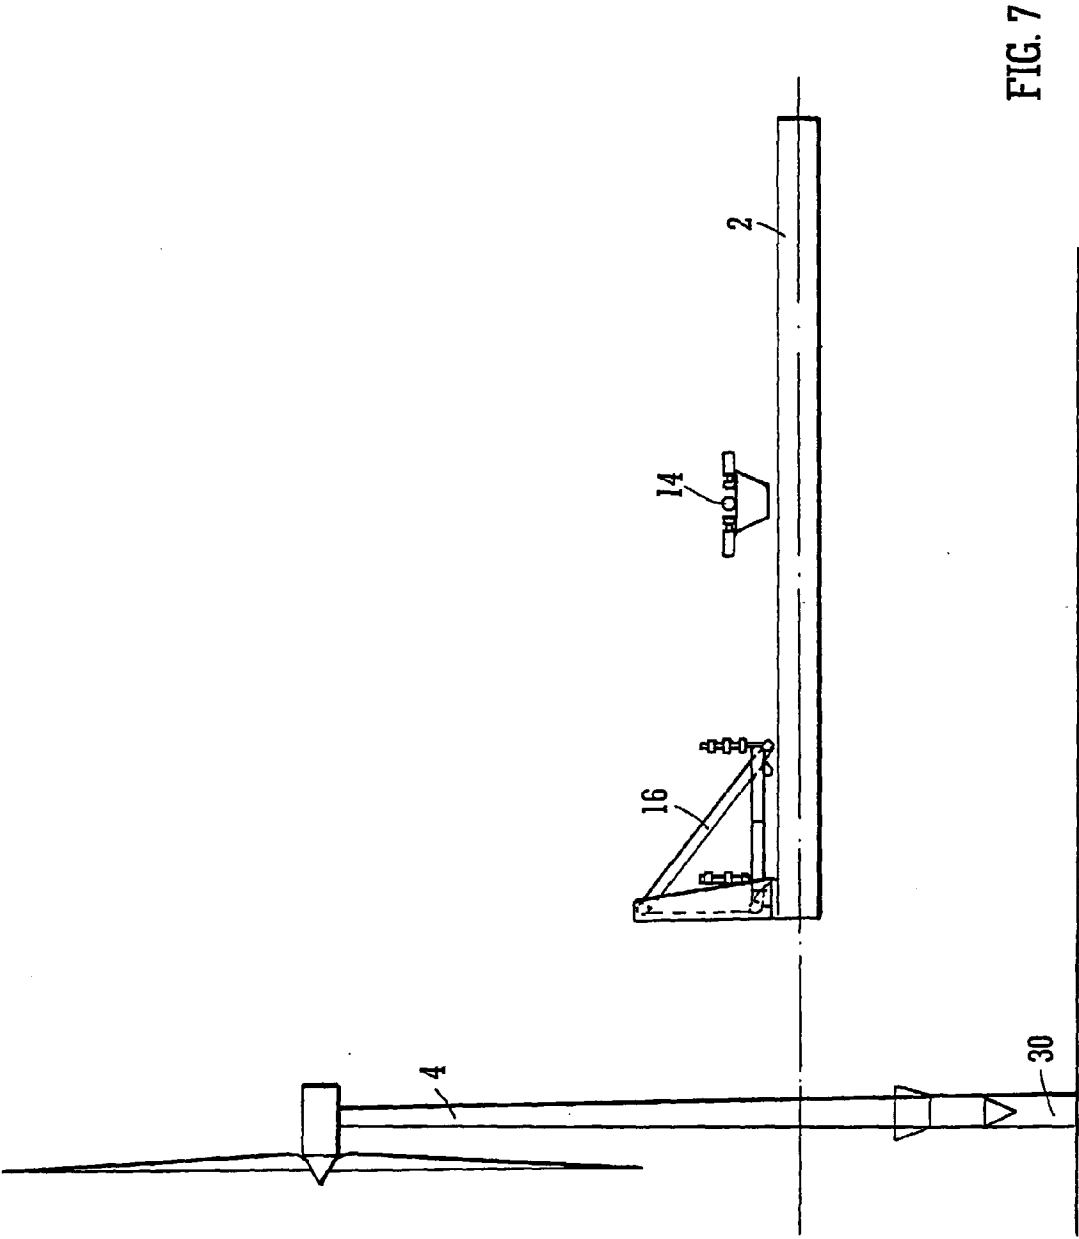


FIG. 7

7/9

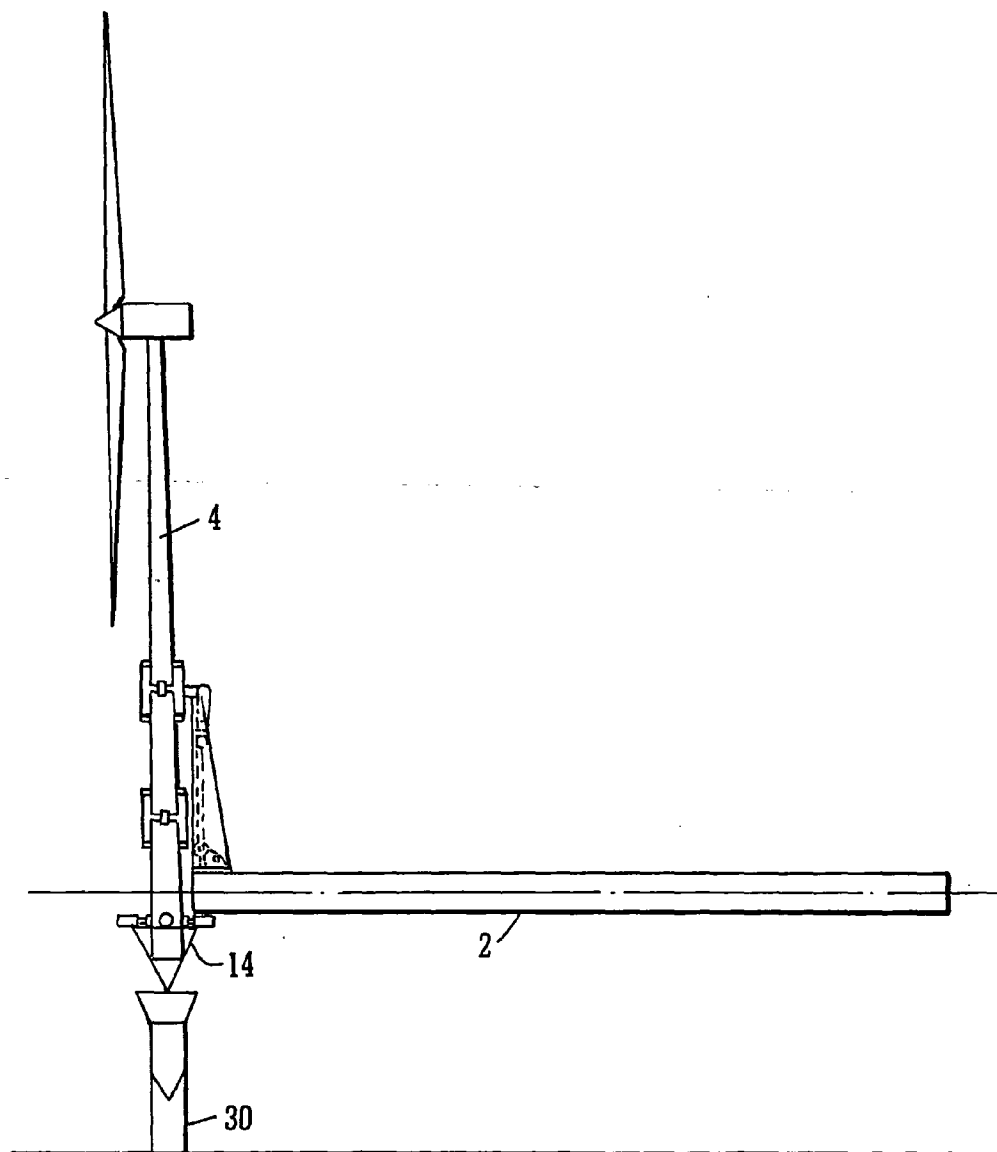


FIG. 8

8/9

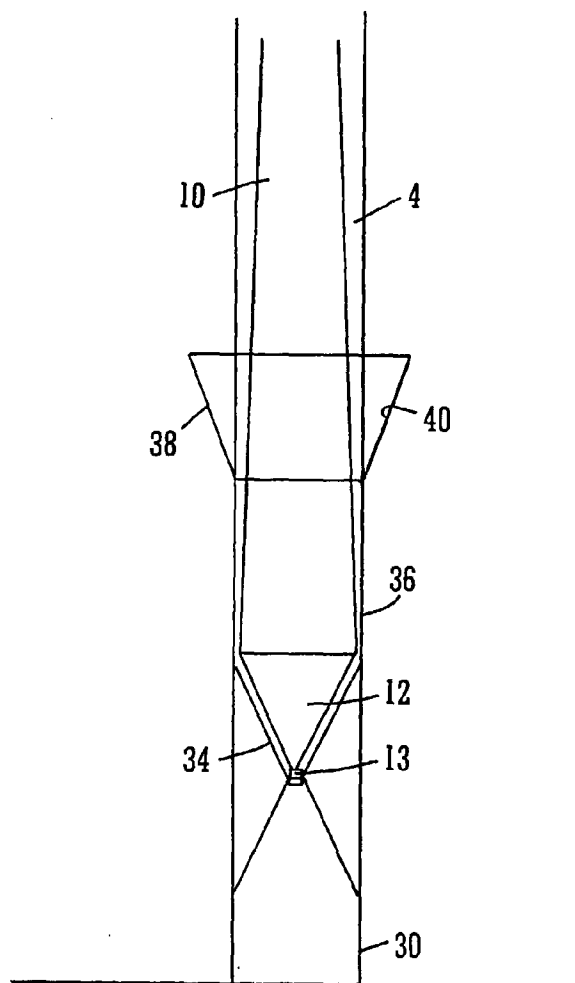


FIG. 9

9/9

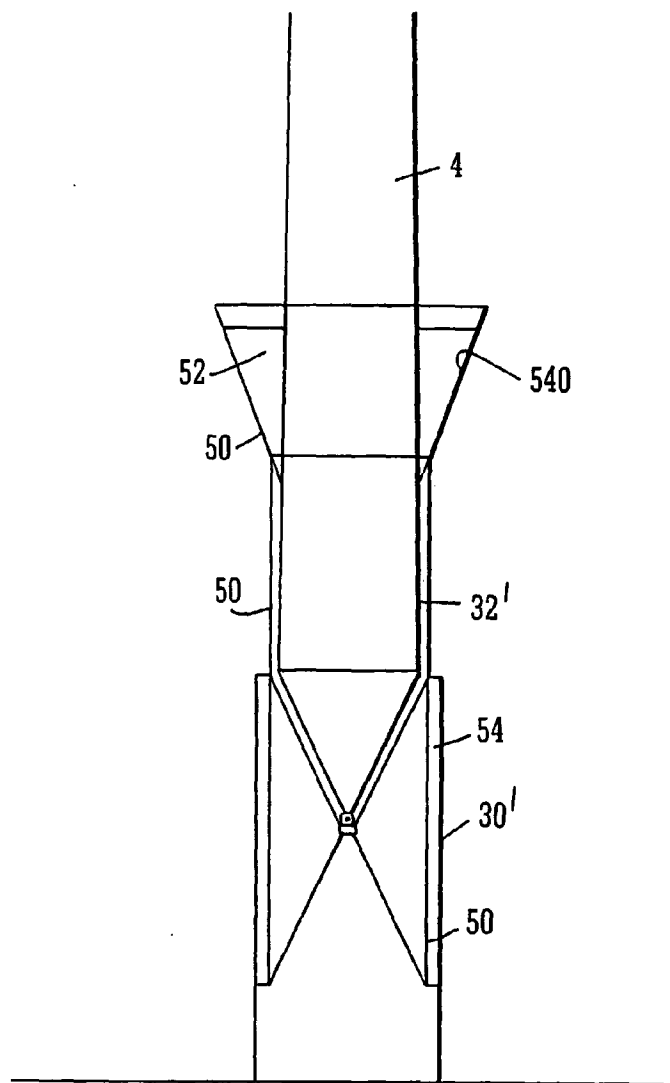


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/04529

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E02D27/42 E02D27/52 E04H12/22 F03D1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E02D E04H F03D E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CH 363 463 A (ANDERSSON GUSTAV MATTIAS) 31 July 1962 (1962-07-31)	1-6, 10-14
Y	page 1, line 35 -page 2, line 5 figures 1,2 ---	7-9,15
Y	CH 241 601 A (DESMEULES FRERES) 31 March 1946 (1946-03-31) page 1, line 31 -page 1, line 44 claims 2,4; figures 1-3 ---	7,9
Y	US 4 406 094 A (HEMPEL JOACHIM ET AL) 27 September 1983 (1983-09-27) figure 1 ---	7,8,15
A	DE 597 543 C (OTTO WEINLIG DR;HEINRICH TOUSSAINT) 26 May 1934 (1934-05-26) figure 1 --- -/--	1,7,9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

4 February 2004

Date of mailing of the international search report

11/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hendrickx, X

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/04529

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 196 07 972 C (STRAEB GMBH & CO GEB) 15 January 1998 (1998-01-15) figures 1,13,15,30 ---	1-15
A	US 6 425 708 B1 (SIEGFRIEDSEN SONKE) 30 July 2002 (2002-07-30) claim 1; figures 1-3 ---	16,22
A	US 3 716 994 A (POGONOWSKI I) 20 February 1973 (1973-02-20) figures 1-3 ---	1,16,22
A	US 4 720 214 A (BRASTED LEE K ET AL) 19 January 1988 (1988-01-19) figures 1,5 -----	16

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/04529

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
CH 363463	A	31-07-1962	NONE	
CH 241601	A	31-03-1946	NONE	
US 4406094	A	27-09-1983	DE 3007442 A1 FR 2477198 A1 NL 8100231 A SE 442310 B SE 8100608 A	03-09-1981 04-09-1981 01-10-1981 16-12-1985 29-08-1981
DE 597543	C	26-05-1934	NONE	
DE 19607972	C	15-01-1998	DE 19607972 C1	15-01-1998
US 6425708	B1	30-07-2002	DE 19860211 C1 AT 222670 T AU 3030800 A CN 1326603 T WO 0039903 A1 DE 59902424 D1 DK 1145397 T3 EP 1145397 A1 ES 2178498 T3 JP 2002534942 T	23-11-2000 15-09-2002 31-07-2000 12-12-2001 06-07-2000 26-09-2002 09-12-2002 17-10-2001 16-12-2002 15-10-2002
US 3716994	A	20-02-1973	NONE	
US 4720214	A	19-01-1988	GB 2192923 A ,B NO 872128 A ,B,	27-01-1988 23-11-1987